

TRC-175 Series Diesel Generator Set

Standby 175 kVA 140 kW **Prime** 158 kVA 126 kW

RICARDO Series



Engine

In Tetra Generator engine products; High performance, low fuel consumption, mechanical or electronic governor depending on the type, Oil, air, fuel filtres are interchangeable, using high technology engine brands in accordance with ISO 3046, ISO 8528, BS 5514, DIN 6271 standards.

ENGINE SPECIFICATION	ONS		
Engine Brand	RICARDO		
Engine Model	R6105BZLD		
Engine Power	145 kW		
Speed (rpm)	1500 d/dk		
Time	6		
Number of Cylinders	6		
Engine Capacity	7 lt		
Bore & Stroke (mmXmm)	105x135		
Compression Ratio	16:1		
Governor Type	Mechanical		
Induction System	Turbacharger/Intercooler		
Combustion System	Direct		
Cooling System	Water Cooling		
Lubrication Capacity	19 lt		
Coolant Capacity	40 lt		
Fuel %100	28 lt		
Consumption %75	21 lt		
liter/hour %50	14 lt		

Alternator

In Tetra Generator alternator products, it has a steel body design, robust structure, maintenance-free bearing system (brushless) with self-excitation system, electronic type voltage regulator, BS 4999-5000; CEI EN 60034-1; IEC 60034-1; VDE 0530, OVE M10, NF 51-100, 111; It uses high technology alternator brands in accordance with NEMA MG 1.22.

ALTERNATOR FEATURES				
Power Factor	8,0			
Insulation Class	Н			
Protection	IP21-IP23			
Output Voltage	231/400 VAC - 50 Hz			
Frequancy	50 Hz			
Connection Type	Star			
Design	4 Poles - Brushless			

RICARDO Series

Control System

Easy-to-use secure software updates in Tetra Generator control panels have a structure that can be easily done with USB ports. Optionally, remote control can be provided with ETHERNET and GPRS. Panel body is made of steel sheet and is painted with electrostatic powder paint. It has been painted. The electronics are isolated and waterproof design.


CONTROL SYSTEM FEATURES LCD Screen Automatic Control System Remote monitoring possibility Multifunctional business opportunity Multi language support Programmable over USB, RS-232 and GSM



Chassis, Canopy and Fuel Tank

Tetra Generator chassis has a modular design and is made of steel. Engine alternator Radiator connections are made with vibration wedges and vibration is minimized. Special chassis and fuel tank in line with customer demands can make designs.

CANOPY			
Canopy design that facilitates generator maintenance			
Emergency stop button on the cabin			
Transparent control cabinet window			
Acoustic sponge providing sound insulation			
Hidden exhaust silencer inside the cabin			
Engine cooling air ducts			
Electrostatic powder paint resistant to corrosion and rusting			
Refueling outside the cabin			

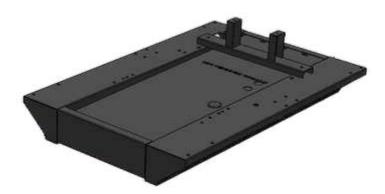

OPTIONS				
Transfer Board	Analog Gauges			
Protection Switch	24 Hour Fuel Tank			
External Type Fuel Tank	Special Chassis Color			
Synchronous System	Special Cabinet Color			
Electronic Governor Application	Remote Monitoring Module			
Earthquake Sensor	Special Type MufLer			

Quality Standards

- All generating sets produced by Tetra Generator have TSE, CE and ISO 9001 certificates.
- Technical information and values are in accordance with ISO8528, ISO3046, NEMA MG1.22, IEC 600341, BS 49995000, VDE 0530 standards.

TECHNICAL DIMENSIONS

1100 mm 3000 mm 1850 mm 1650 kg 240 UNCABINET GROUP WIDTH LENGTH HEIGHT WEIGHT FUEL TA	CABINET GROUP							
UNCABINET GROUP WIDTH LENGTH HEIGHT WEIGHT FUEL TA	WIDTH	LENGTH	HEIGHT	WEIGHT	FUEL TANK			
WIDTH LENGTH HEIGHT WEIGHT FUEL TA	1100 mm	3000 mm	1850 mm	1650 kg	240 lt			
	UNCABINET GROUP							
1/501	WIDTH	LENGTH	HEIGHT	WEIGHT	FUEL TANK			
1100 mm 2600 mm 1600 mm 1450 kg 240	1100 mm	2600 mm	1600 mm	1450 kg	240 lt			

